

TECHNICAL CHARACTERISTICS

SGINGER

# Ginger




## Wood

The seat for the Ginger chair, with its soft and rounded shapes, rests on a wooden collar base. A sculptural design that provides comfort and cosiness.

DESIGNED BY SEBASTIAN HERKNER



**ondarreta**

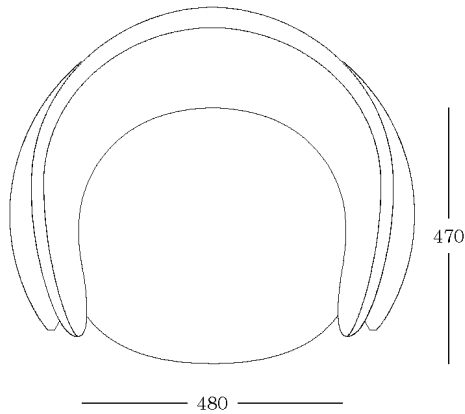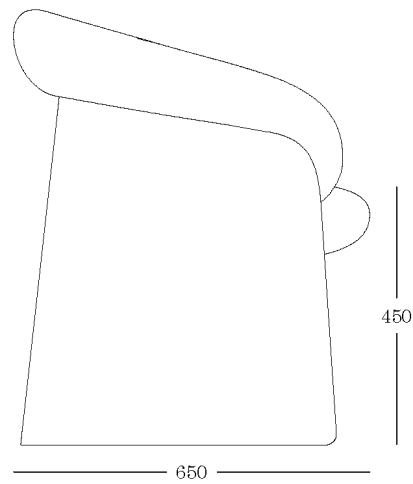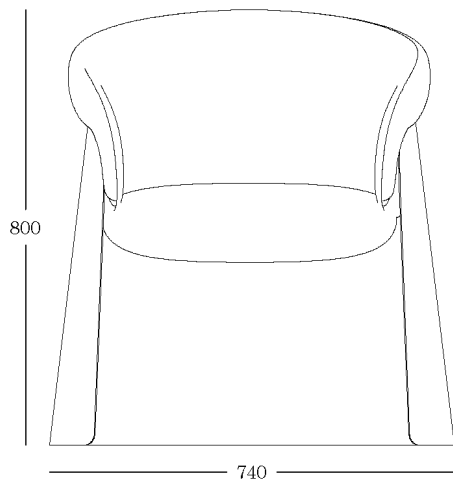

### DIMENSIONS

74 cm x 65 cm x 80 cm x 45 cm (29,1" x 25,6" x 31,5" x 17,7") [width x depth x height x seat height]

### WEIGHT

14,6 kg (32,2 lb.)

### PACKAGING

One chair per box.

Box dimensions:

74 cm x 67 cm x 82 cm (29,1" x 26,4" x 32,3")

### CERTIFICATION

Designed in accordance with the Ecodesign standard UNE-EN ISO 14006:2011.

PEFC certify wood.

Product tested under the European standard EN 16139:2013, category of general use L2.

### ORIGIN

100% Made in Europe

### DESIGN

Sebastian Herkner



## COMPONENTS

### **FRAME**

#### **Oak**

Oak wood on 12 mm (0,47") thick beech. It is made with especially treated sheets to optimize bending, reinforced with alternate arrangement of fibers to gain resistance, glued, pressed and CNC machined.

#### **Finish**

Stained

#### **Steel**

20x20 mm (0,79"x 0,79") side and 1.5 mm (0,06") thickness cold laminated steel tube and 3mm (0,12") thick laser cut steel sheet.

#### **Finish**

Epoxy linen or black

### **SEAT AND BACK**

#### **Flexible polyurethane**

Flexible polyurethane injection, a two-component foam system based on Polioli and Iso preparation, of superior quality and ergonomics, on a technical wood core for the seat and rigid polyurethane for the backrest.

#### **Finish**

Removable fabric

## METAL FINISHES

### **EPOXYS**

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

#### **Technical Characteristics:**

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)

## WOOD FINISHES

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

#### **Technical characteristics:**

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

## COM REQUIREMENTS

Seat and backrest: 250 cm

For COM tissues it will be necessary to test viability.

Ondarreta only recommends plain fabrics for this product.