

TECHNICAL CHARACTERISTICS

MGIN

Gin


Table h65

Craftsmanship and technique go hand-in-hand in the Gin table design. Available in different heights, this table stands out for the complex wooden curvature of its legs and the round shapes of its table top.

DESIGNED BY SEBASTIAN HERKNER



ondarreta

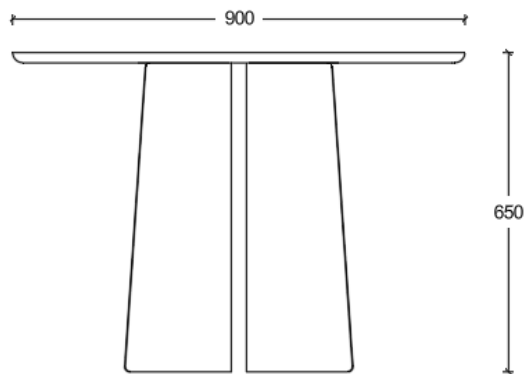

DIMENSIONS

Height: 65cm (25,6")
Free height: 63 cm (24,8")
80 cm (31,5") [diameter]
90 cm (35,4") [diameter]

WEIGHT

23 kg [50,7 lb] (ø80)
26 kg [57,3 lb] (ø90)

PACKAGING

Palletised

ø 80 cm

Box 1: ø90 cm x 10 cm (ø 35,4" x 3,9")

Box 2: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

ø 90 cm

Box 1: ø100 cm x 10 cm (ø 39,4" x 3,9")

Box 2: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

CERTIFICATION

Designed and certified in accordance with the Ecodesign standard UNE-EN ISO 14006:2011

PEFC certify wood

ORIGIN

100% Made in Europe

DESIGN

Sebastian Herkner



COMPONENTS

LEGS

Oak

Oak wood on 18,5 mm (0,73") thick beech. It is made with especially treated sheets to optimize bending, reinforced with alternate arrangement of fibers to gain resistance, glued, pressed and CNC machined.

Finish

Stained

TABLETOP SUPPORT

Steel

5 mm (0.2") thick laser cut steel sheet.

Finish

Epoxy black

TABLETOP

Oak + MDF

European Oak sheet on technical wood table of 20 mm (0.79") thick, CNC machined and beveled edge.

Arpa fenix + MDF

Arpa Fénix laminate glued and pressed in high temperatures on technical wood table of 20 mm (0.79") thick, CNC machined and beveled edge.

Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Technical characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate.

WOOD FINISH

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical characteristics:

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)